



Available for Rental

Maintenance - Striker Bar Torque Specification All Grizzly Mill Hogs


All Grizzly Mill 4836, 4848, 4860, 4872

Brunette Machinery Company Inc. recommends required torque of striker bar bolts to 2000 ft/lbs (wet), 2400 ft/lbs (dry). Some customers expressed concern that this torque will exceed the limitation of most mechanical multipliers.

Brunette Service offers a pneumatic torque wrench for rental with custom jig designed for this purpose. The tool and jig are shown below and are shipped complete with operating instructions at a cost of \$535.00 per one week minimum and \$115.00 per additional day.

This tooling dramatically reduces the time required to replace a set of striker bars and ensures the fasteners are torqued to specification.

Rental units available from Surrey and Prince George locations.

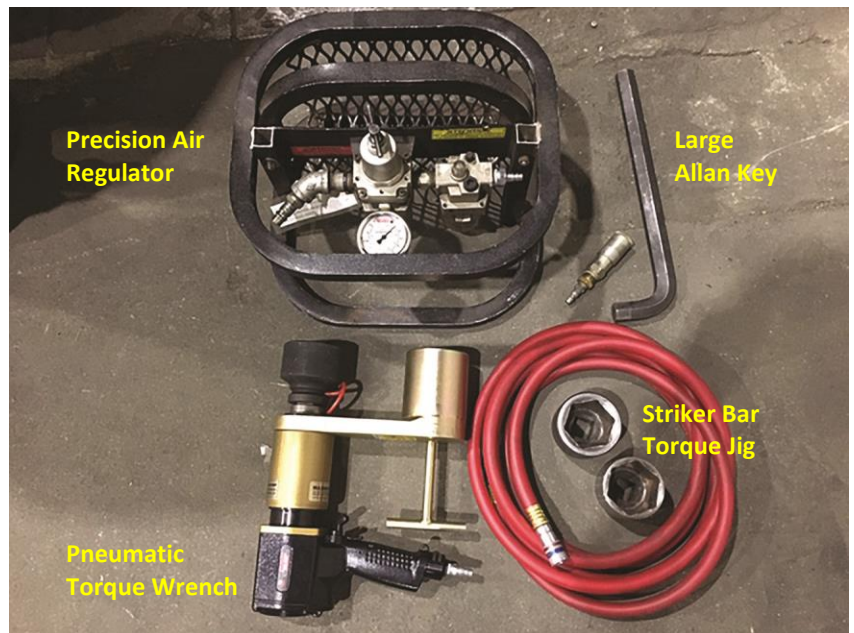

For more information please contact Sonia at Brunette Parts & Service at **604.522.3977** or email: sonia@brunettemc.com

Brunette Machinery Company Inc.
8717 132nd Street
Surrey, BC
Canada V3W 4P1
Ph: (604) 522-3977
Fax: (604) 522-6806

BRUNETTE 
www.brunettemc.com

Brunette Machinery Company Inc.
1076 Great Street
Prince George, BC
Canada V2N 2K8
Ph: (250) 563-0596
Fax: (250) 563-8179



COMPONENTS INCLUDED:

- 1. Two (2) 1" Impact Sockets: 2-1/4" and 2-3/16"**
- 2. Impact socket adaptor**
- 3. Pneumatic torque gun (serial #1161221) with plastic spline protector**
- 4. Filter/regulator assembly c/w gauge and 1/2" hose**
- 5. 3/4" Hansen hose adaptor (quick disconnect)**
- 6. 1" Allen wrench**